

SEKOL

Lead the World...

Collection of
**PORCELAIN GLAZED
VITRIFIED TILES**

600 x 1200mm



SURFACE

• GLOSSY

• MATT

• HIGH GLOSS

• SATIN

• ROCKER

• DECORE



CHARACTER IDENTIFICATION



Floor Application



Wall Application



Rectified



Position



Glossy



Semi Polished



Matt



No. of variation in Pattern



USER GUIDE







Matt Series



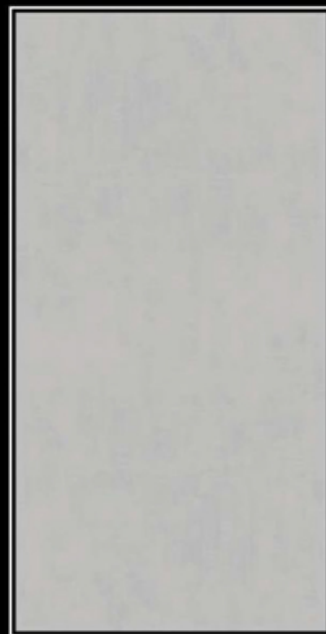
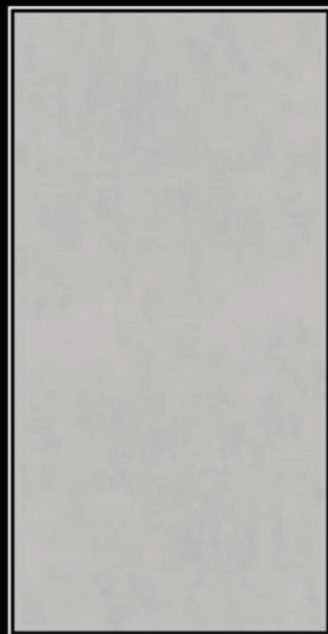





Single Random Design


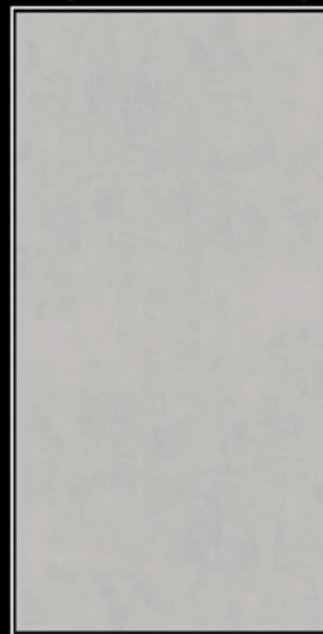


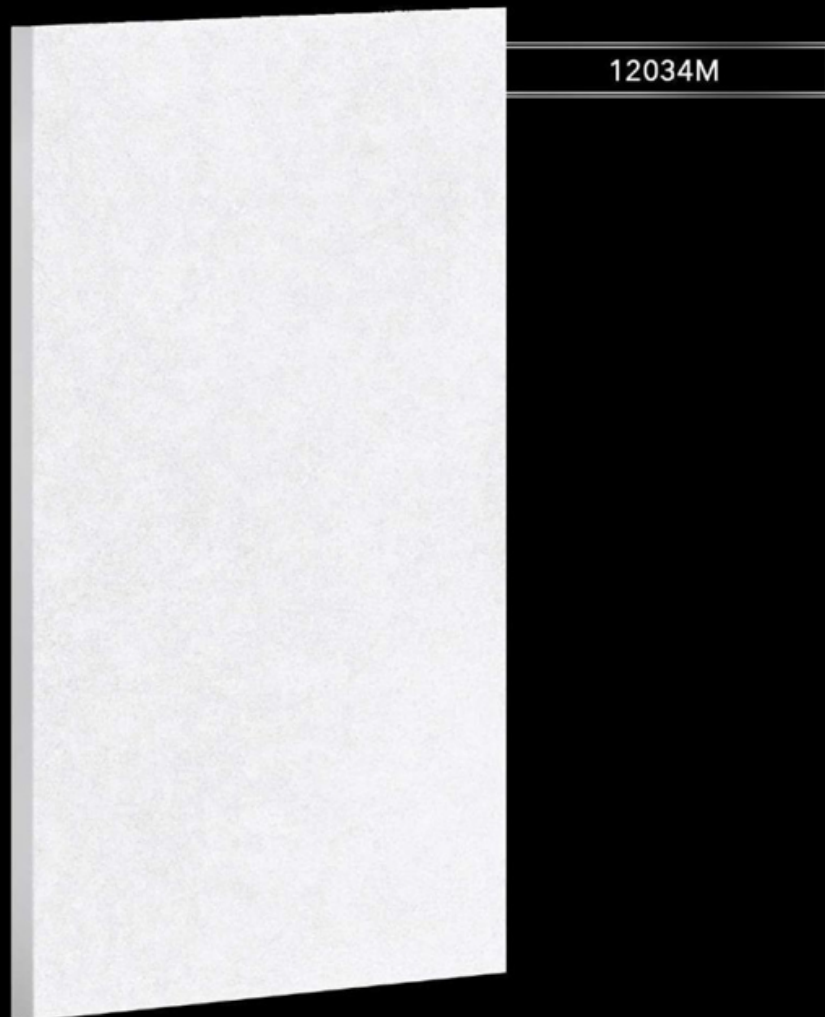



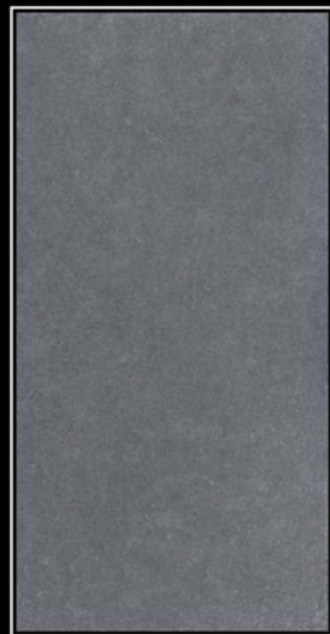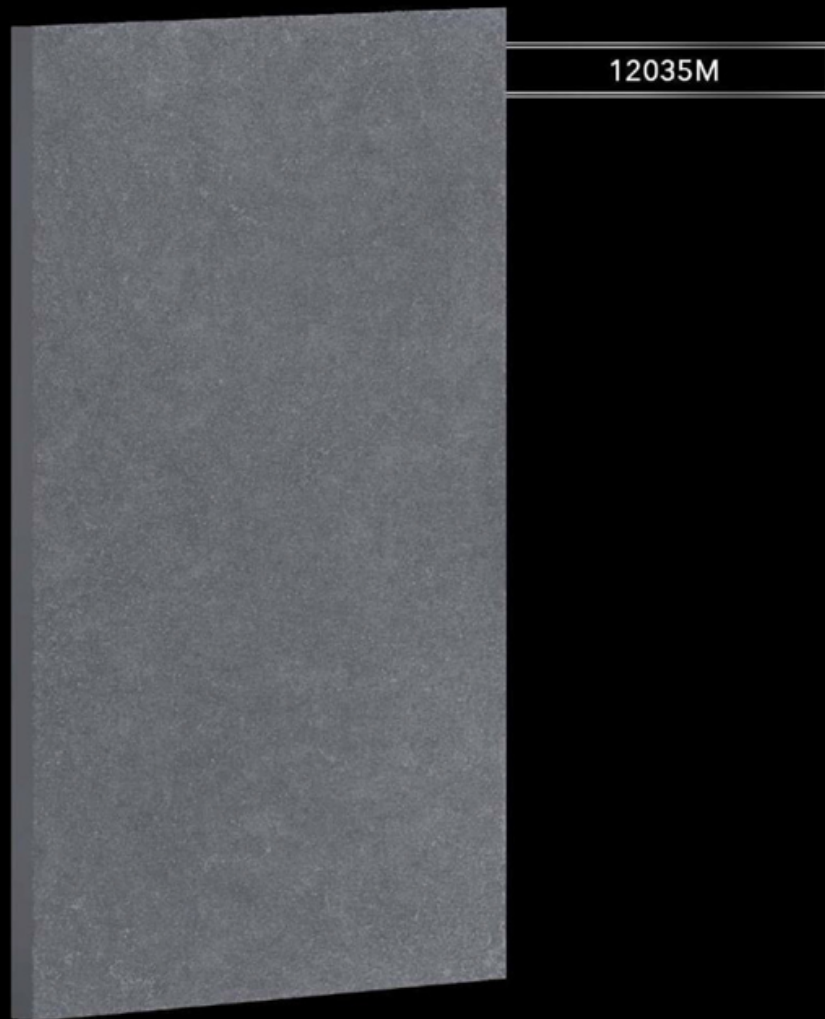

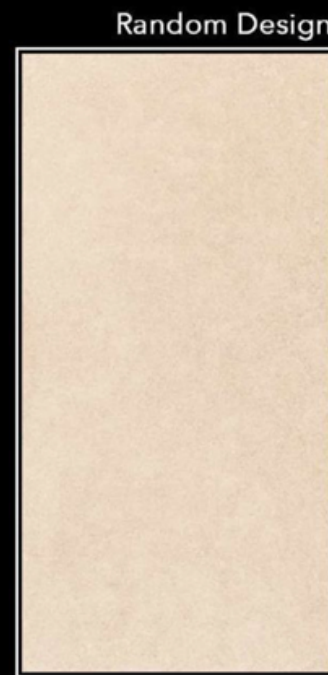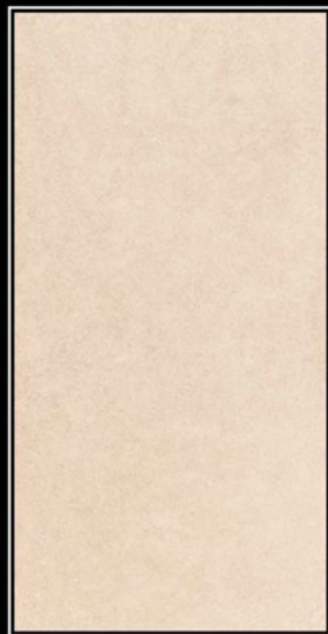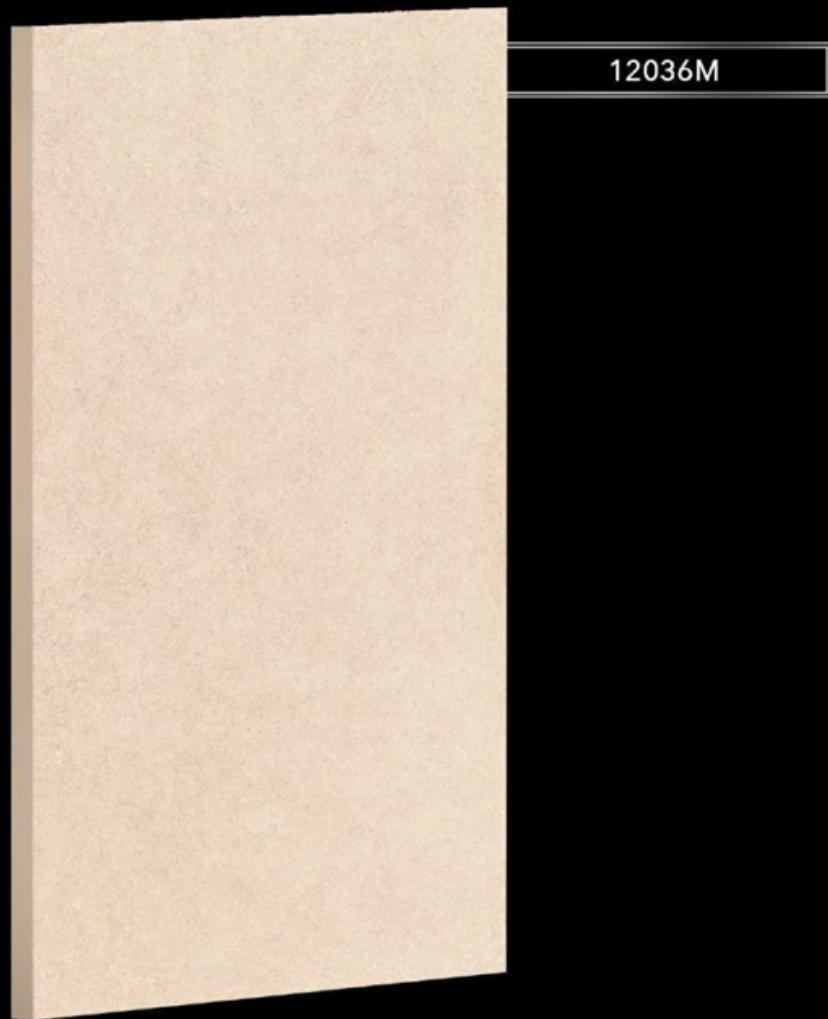

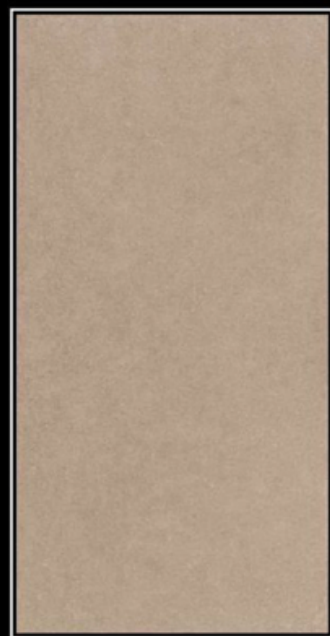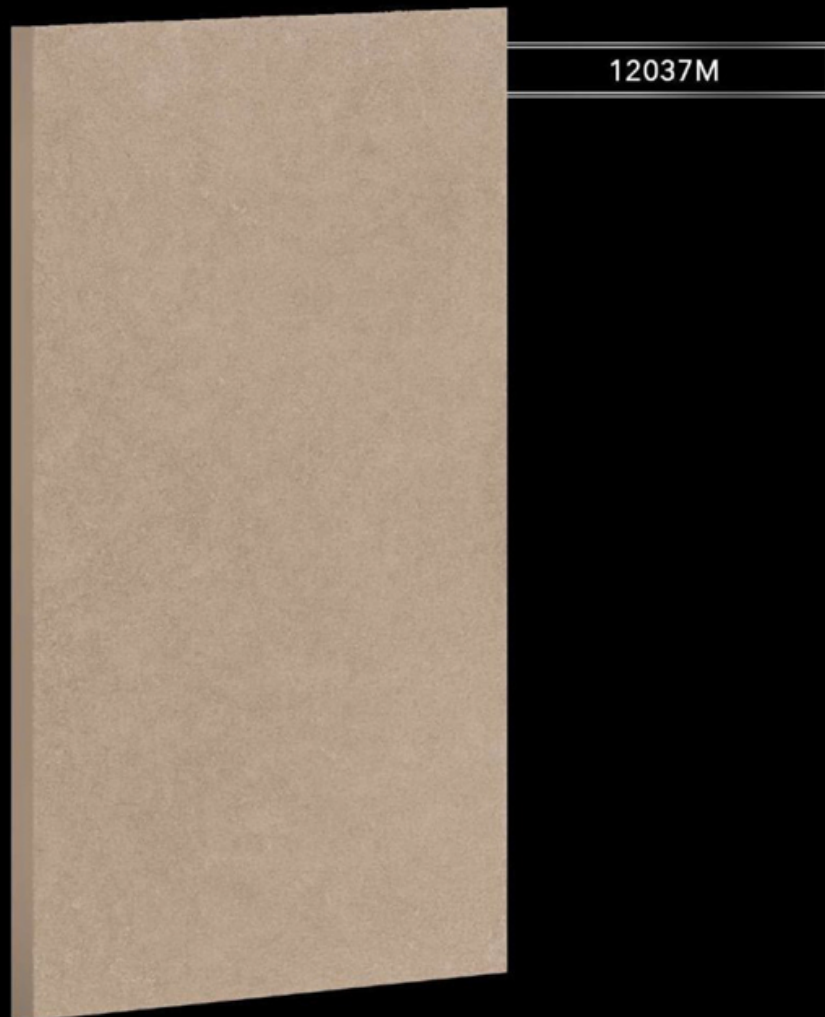



12038M



Random Design









12039M




Random Design





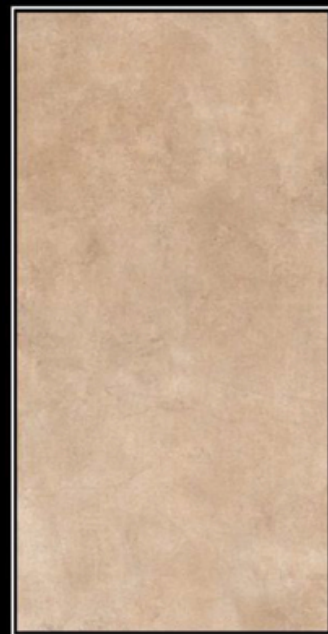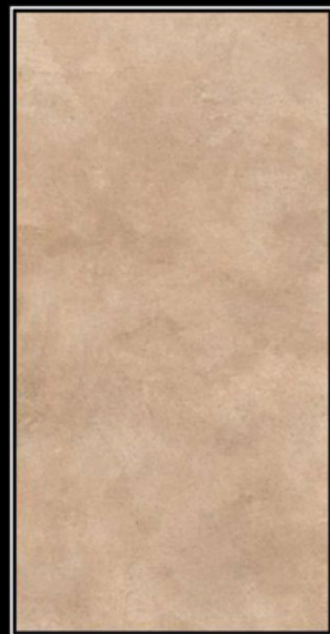
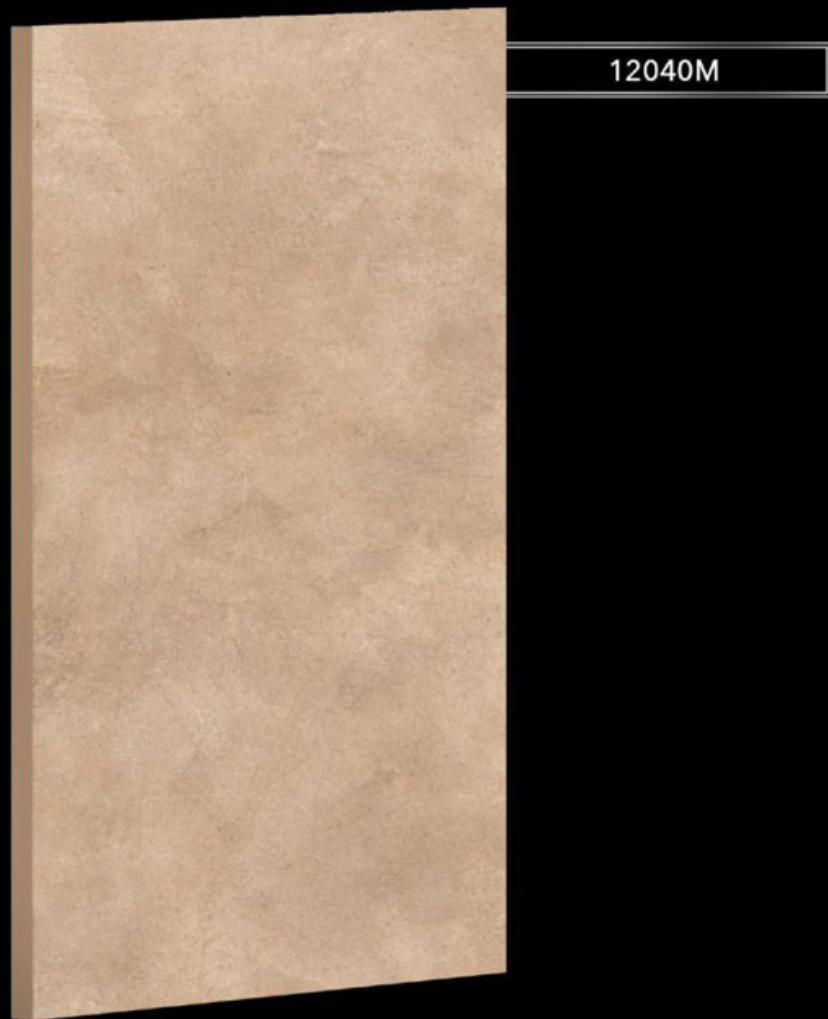


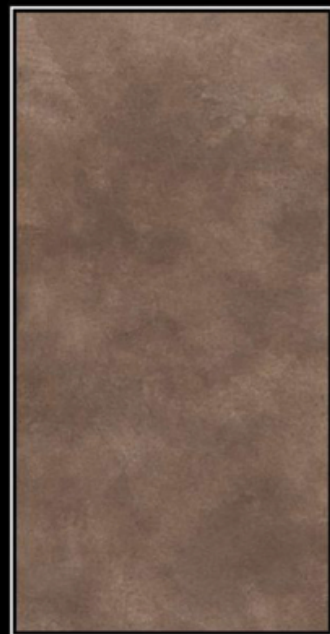






12044M

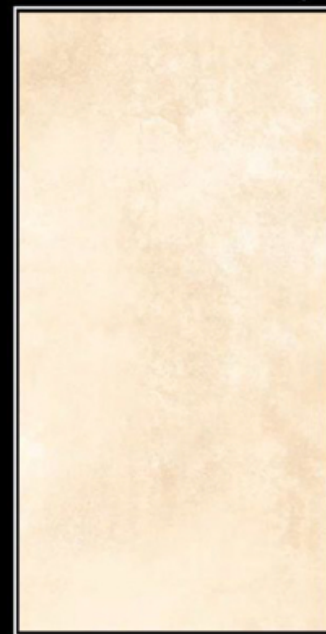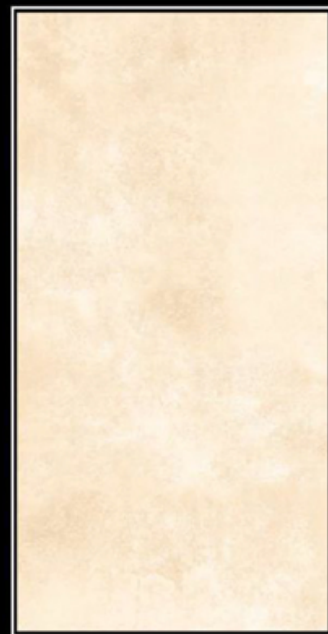

Random Design







12045M



Random Design




MATT



600x1200mm



300x600mm



600x600mm



12046M

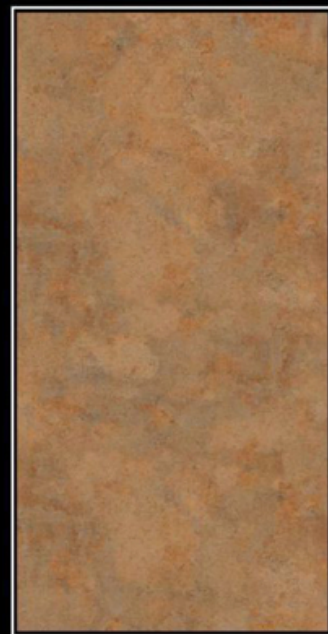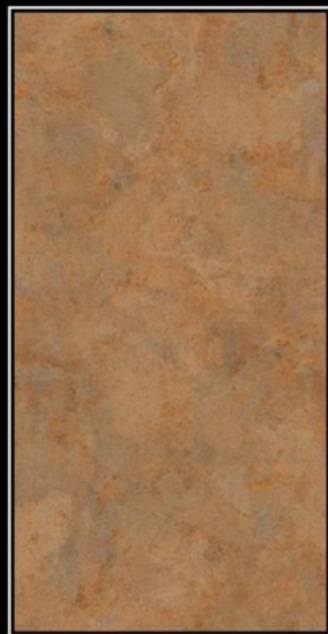


Random Design






12047M

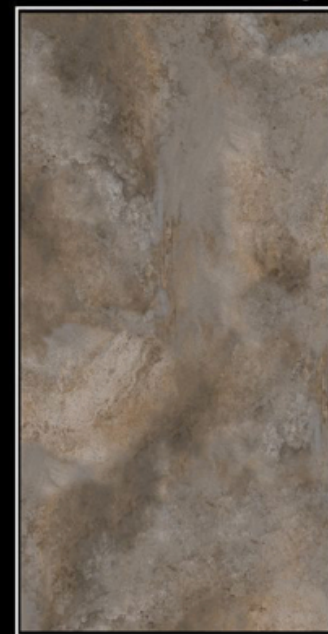

Random Design



HEALTH


SPA AND WELLNESS







Single Random Design





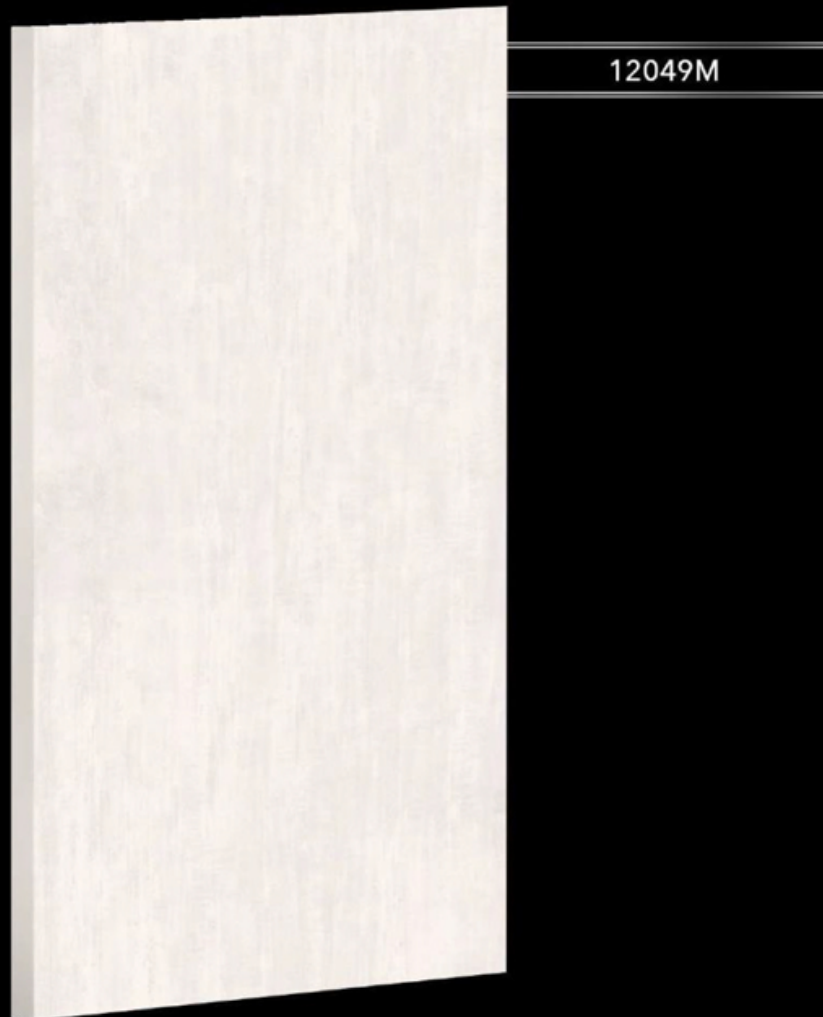


Single Random Design

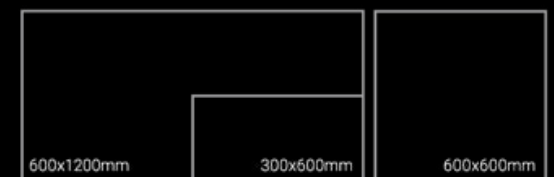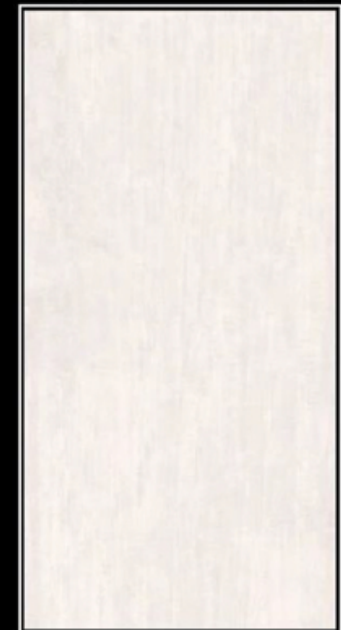



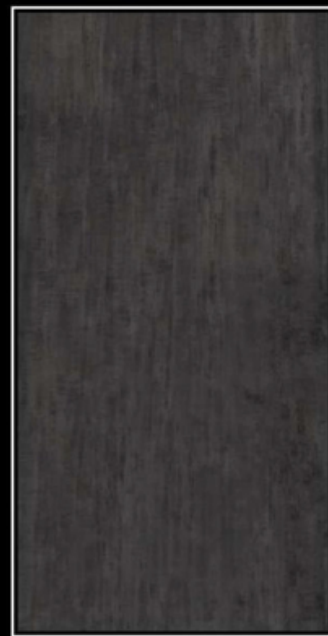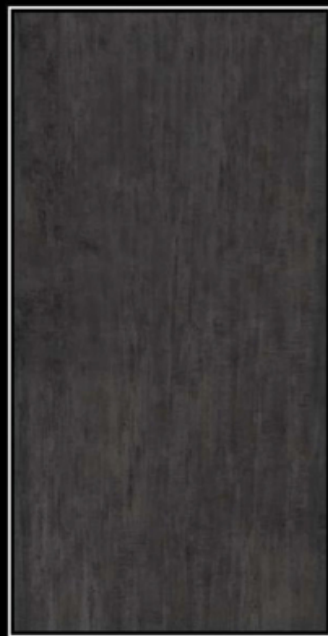

Single Random Design

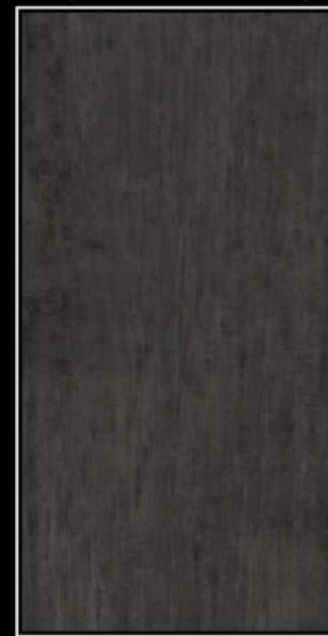





12052M



Random Design




MATT



600x1200mm

300x600mm





600x600mm







12051M




Random Design




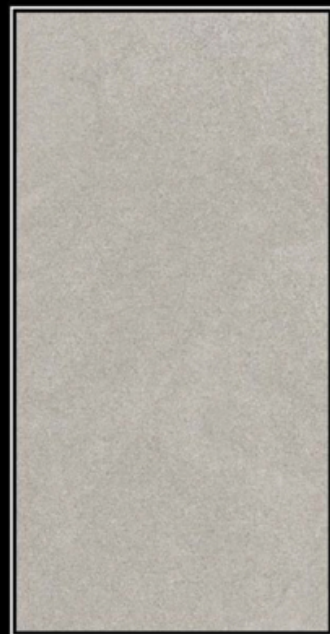


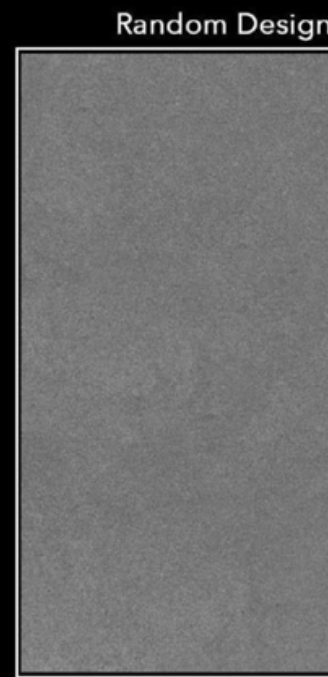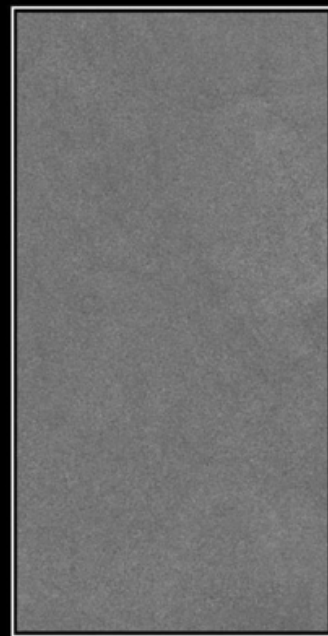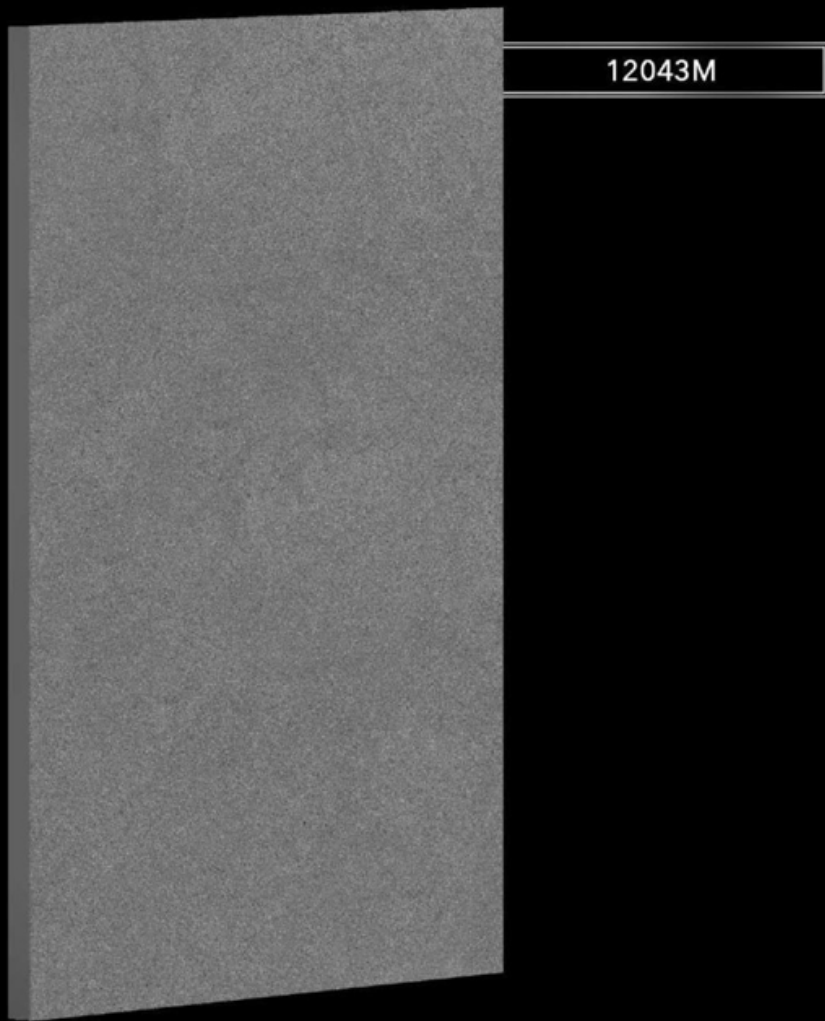



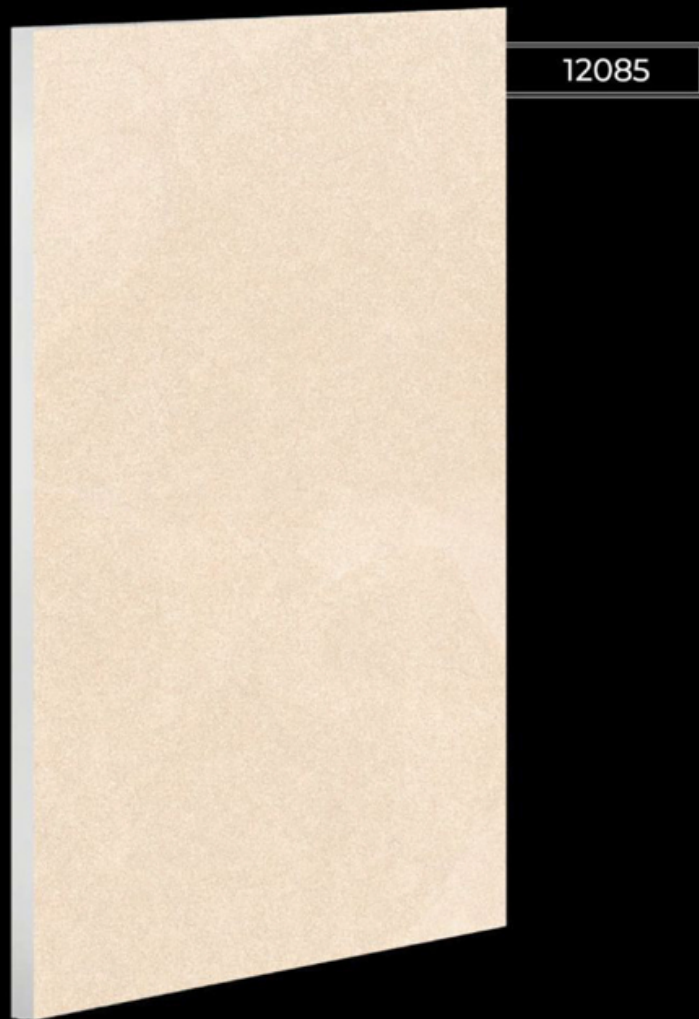


12085

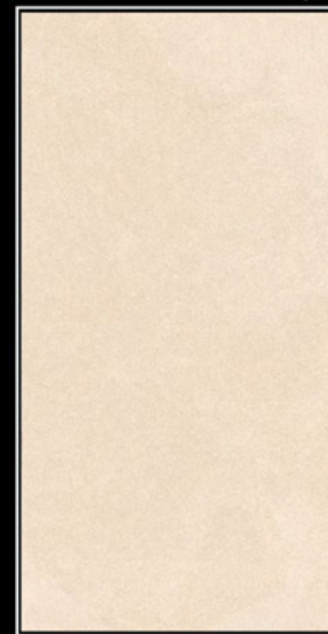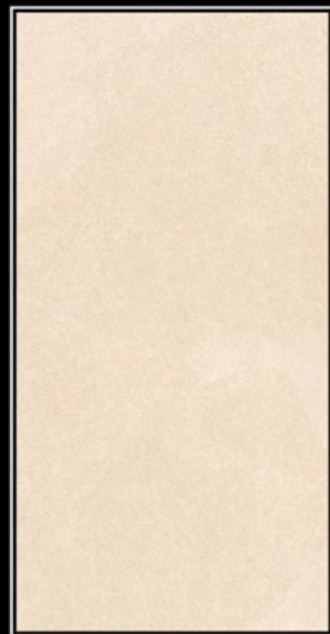

Random Design




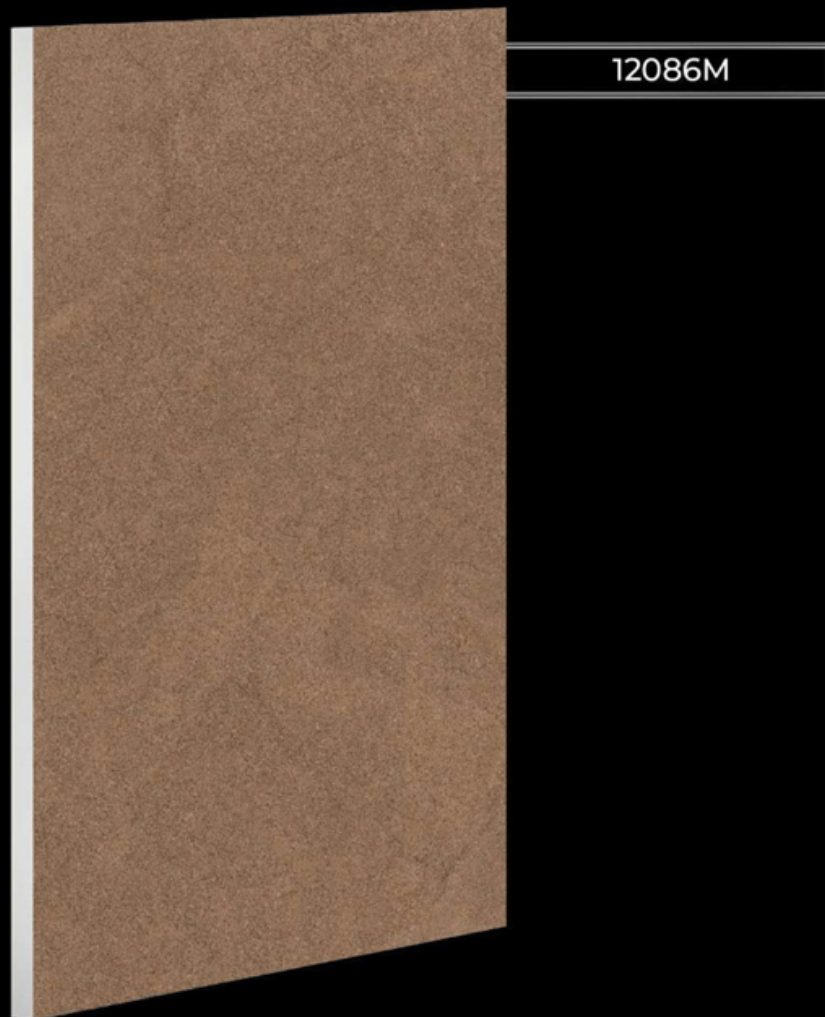

12086M



Random Design



TECHNICAL SPECIFICATION

PROPERTIES	TEST EN: 14411 : 2016 (GROUP BLA.) ANNEX - G STANDARD AS PER ISO 13006 : 2018	MARBILANO RESULT	TESTING METHOD
Dimention and Surface Quality			
Deviation in Length	± 1 mm	0.00 - 0.10mm	EN ISO 10545 - 2
Deviation in Width	± 1 mm	0.00 - 0.10mm	EN ISO 10545 - 2
Deviation in Thickness	± 0.5mm	0.00 - 0.18mm	EN ISO 10545 - 2
Straightness of Sides	± 0.8mm	0.12 - 0.14mm	EN ISO 10545 - 2
Rectangularity	± 0.8mm	0.14 - 0.16mm	EN ISO 10545 - 2
Surface Flatness	± 1.8mm	0.00 - 0.15mm	EN ISO 10545 - 2
Surface quality	95%	100% free from defects	EN ISO 10545 - 2
Physical Property			
Water Absorption %	0.500%	0.020%	EN ISO 10545 - 3
Breaking Strength N	1300	2255.52N	EN ISO 10545 - 4
Modulus of Rupture (MOR) N/mm2	35	50.34N/mm²	EN ISO 10545 - 4
Resistance to surface abrasion		PEI Class - IV 2100 Revolu on pass	EN ISO 10545 - 7
Coefficient of Linear Thermal Expansion	9 x 10 ⁻⁶ Max	5.23 x 10 ⁻⁶	EN ISO 10545 - 8
Thermal Shock Resistance	10 cycle Min	confirm	EN ISO 10545 - 9
Crazing Resistance	No crazin in two cycle	confirm	EN ISO 10545 - 11
Moisture Expansion (mm/mm)	0.02 mm/m Max.	0.00 mm/m Max.	EN ISO 10545 - 10
Impact Resistance	0.55 Min.	0.58	EN ISO 10545 - 5
Scrach hardness of Surface (mohs scale)	5 moh's scal	5 moh's	IS 13630 - 13
Bulk density (g/cc)	2.2 Min.	2.2913 g/cc	EN ISO 10545 - 3
Chemical Property			
Resistance Stain	Min Class - 3	Min Class - 5	EN ISO 10545 - 14
Resistance to Low Concentration of Acid & Alkali	Min Class - GLC	Class - GLA	EN ISO 10545 - 13
Resistance to High Concentration of Acid & Alkali	Min Class - GHC	Class - GHA	EN ISO 10545 - 13
Resistance to house chemical	Min Class - GC	Class - GA	EN ISO 10545 - 13
Resistance to swimming pool salt	Min Class - GC	Class - GA	EN ISO 10545 - 13
Lead and Cadium Release	0.1 mg/dm²	0.00 mg/dm²	EN ISO 10545 - 15

SEKOL

Lead the World...



8-A National Highway , Sartanpar Road,
Sartanpar, Behind Slim Tiles Pvt Ltd,
Morbi, Gujarat, 363642, India.

 www.sekoltiles.com
 sekoltiles@gmail.com

+91 97264 18181

+91 97264 18189